

PRODUCT FEATURES

- Designed to glow beautifully through crystal housing formed around an inner etched LED diffuser
- 7" tall and 4" wide
- Available in three finishes, aged brass, chrome and satin nickel
- Mounts horizontally or vertically
- ADA Compliant
- Protected by a 5-year warranty. please visit the "About Us" Page on techlighting.com for more for warranty details



LAMPING

Includes 120 volt 9 watt, 536.6 delivered lumens, 3000K LED module.
Dimmable with most LED compatible ELV TRIAC and 0-10V dimmers.
Mounts horizontally or vertically

Aged Brass



Aged Brass



Chrome



Satin Nickel

ORDERING INFORMATION

700WSMLY	LENGTH (A)	FINISH	LAMP
	7 7"	R AGED BRASS C CHROME S SATIN NICKEL	-LED930 INTEGRATED LED 90 CRI 3000K 120V-277V UNV (T24)

700WSMLY _____


JOB NAME _____

NOTES _____



SPECIFICATIONS

HARDWARE MATERIAL	Metal
SHADE MATERIAL	Acrylic
NET WEIGHT	5 lbs
HEIGHT	7in
WIDTH	2.5in
LENGTH	4in
MIN. EXTENSION FROM WALL	2.5in
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	Yes
DRY LISTED	
UP / DOWN	
HORIZONTAL / VERTICAL	
WALL / CEILING MOUNT	
GENERAL LISTING	ETL Listed
ADA COMPLIANT	
INCLUDES	

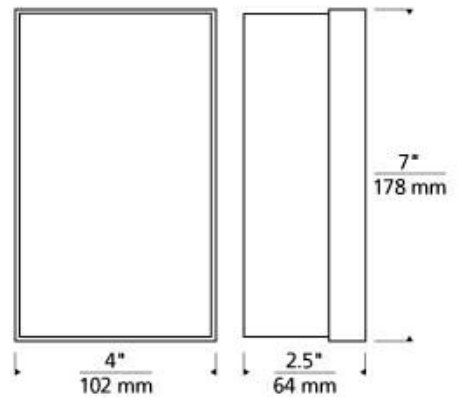

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS		536.6		
WATTS		9		
MAX WATTAGE PER BULB		9W		
INPUT VOLTAGE		120V		
DIMMING TYPE*		0-10, ELV, TRIAC		
CCT		3000K		
CRI		90 CRI		
LED LIFETIME				
L70		>50000		
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE		Integrated LED		
LAMP SHAPE		Integrated LED		
LAMP INCLUDED?		Y		
WARRANTY**		5 Years		

*Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.	Yes		
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.	N/A		

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

